


DE-R 216 Diffractive Optical Element

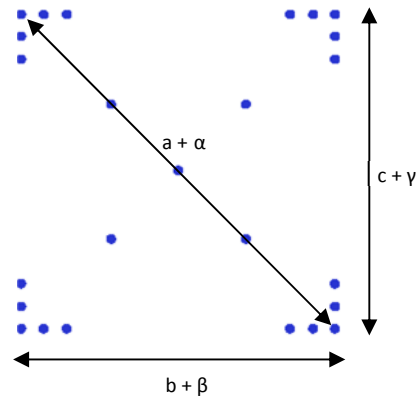

- **Element Number:** DE-R 216
- **Current Product Revision:** A
- **Description:** Viewfinder
- **Substrate material:** Polymethyl Methacrylate (PMMA)
- **Size (Ø x Thickness):** 8 x 1 mm
- **Design wavelengths:** 488 nm
- **Recommended wavelength range:** 405-488 nm
- **Minimum recommended beam diameter:** 0.5-1 mm


Pattern size and pattern angles and the intensity in the undiffracted central spot ('zero order intensity', see reverse page) will vary most with the wavelength. Within the recommended wavelength range, the element shows the lowest intensity in the central spot.

Diffraction efficiencies given on this datasheet have been measured using elements of product revision B.

Geometry and Diffraction Angles

Wavelength	Pattern Size @ 100 mm Distance			Pattern Angles		
	a	b	c	α	β	γ
405 nm	11.3 mm	8 mm	8 mm	6.4°	4.6°	4.6°
488 nm	13.6 mm	9.6 mm	9.6 mm	7.8°	5.5°	5.5°
543 nm	15.1 mm	10.7 mm	10.7 mm	8.6°	6.1°	6.1°
594 nm	16.6 mm	11.7 mm	11.7 mm	9.5°	6.7°	6.7°
635 nm	17.7 mm	12.5 mm	12.5 mm	10.1°	7.1°	7.1°
650 nm	18.1 mm	12.8 mm	12.8 mm	10.4°	7.3°	7.3°
730 nm	20.4 mm	14.4 mm	14.4 mm	11.6°	8.2°	8.2°
780 nm	21.8 mm	15.4 mm	15.4 mm	12.4°	8.8°	8.8°
808 nm	22.6 mm	15.9 mm	15.9 mm	12.9°	9.1°	9.1°

Setup

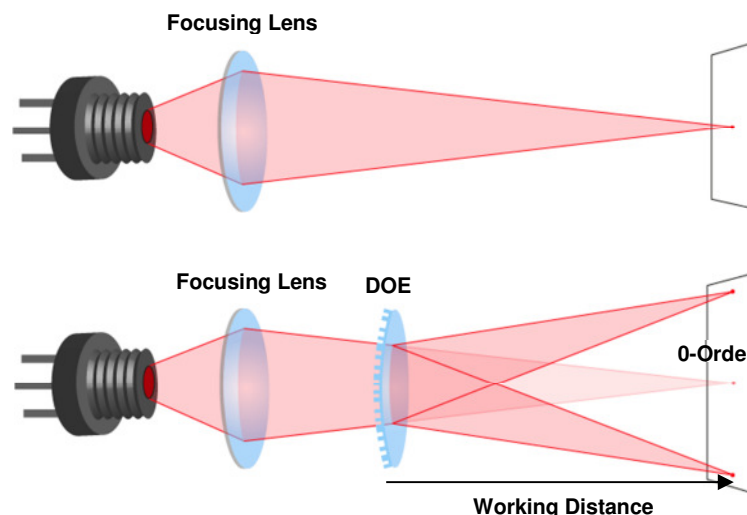


Laser diodes are the most common light source to be used with diffractive optical elements, but other laser light sources may also be used.

The DOEs are best used with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser.

The 0-order spot is equivalent in size and shape to the original beam, but its power is attenuated.

MOUNTED VERSION

For testing or setups under laboratory conditions we offer a version mounted in 12.7 mm stainless steel frame for use with standard laboratory holders.

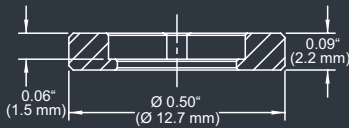


COLLIMATED / CONVERGING LASER

The laser can be collimated for long range use or converging for a fixed working distance.

Please note that the size/thickness of each spot or line depends on the focusing of the laser.

Diffraction Zero Order Intensity:

Wavelength	0-Order Intensity
405	0.9%
450	0.3%
515	4.3%
594	13.2%
654	16.4%
687	25%
780	35%

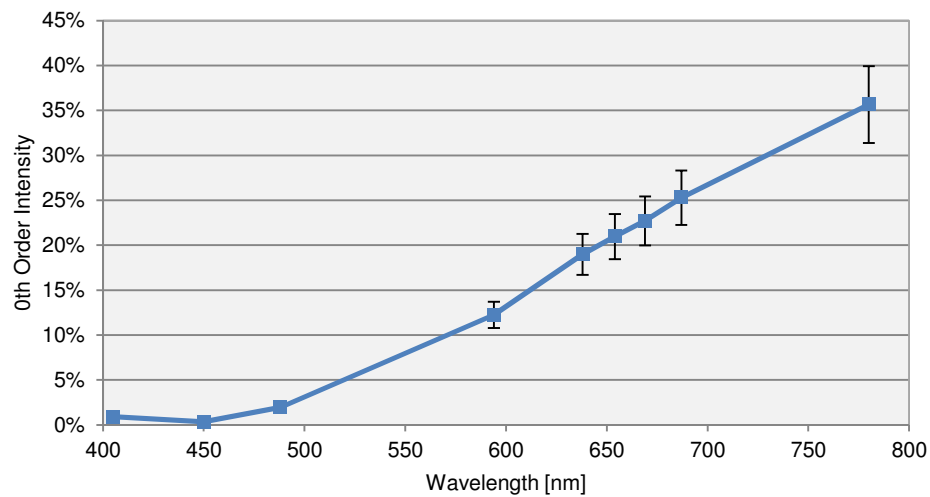

HOLOEYE Photonics AG
Volmerstr. 1
12489 Berlin, Germany
contact@holoeye.com
www.holoeye.com