




DE-R 286 Diffractive Optical Element



- **Element Number: DE-R 286**
- **Current Product Revision: A**
- Description: Quasi Continuous Line - 30
- Number of Spots on Line: 875
- Substrate Material: Polymethyl Methacrylate (PMMA)
- Size (Ø x Thickness): 8 x 1 mm
- Design Wavelengths: 660 nm
- Recommended Wavelength Range: 600-700 nm
- Minimum Recommended Beam Diameter: 0.5 mm

MOUNTED VERSION

For testing or setups under laboratory conditions we offer a version mounted in 12.7 mm stainless steel frame for use with standard laboratory holders.

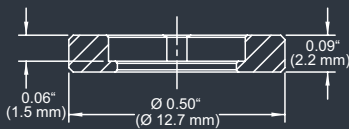

Ø 0.32" (Ø 8.0 mm)

Thorlabs 8 mm steel lens adapter

COLLIMATED / CONVERGING LASER


The laser can be collimated for long range use or converging for a fixed working distance.

Please note that the size/thickness of each spot or line depends on the focusing of

Pattern Geometry and Diffraction Angles

Wavelength	Line Width @ 100 mm Distance	Spot-to-spot spacing @ 100 mm Distance	Pattern Angle
	a		α
450 nm	36.49 mm	83.49 μm	20.68°
488 nm	39.68 mm	90.81 μm	22.45°
515 nm	41.97 mm	96.05 μm	23.70°
532 nm	43.42 mm	99.36 μm	24.50°
635 nm	52.36 mm	119.81 μm	29.34°
650 nm	53.68 mm	122.84 μm	30.05°
730 nm	60.86 mm	139.28 μm	33.85°
780 nm	65.46 mm	149.80 μm	36.25°

Setup

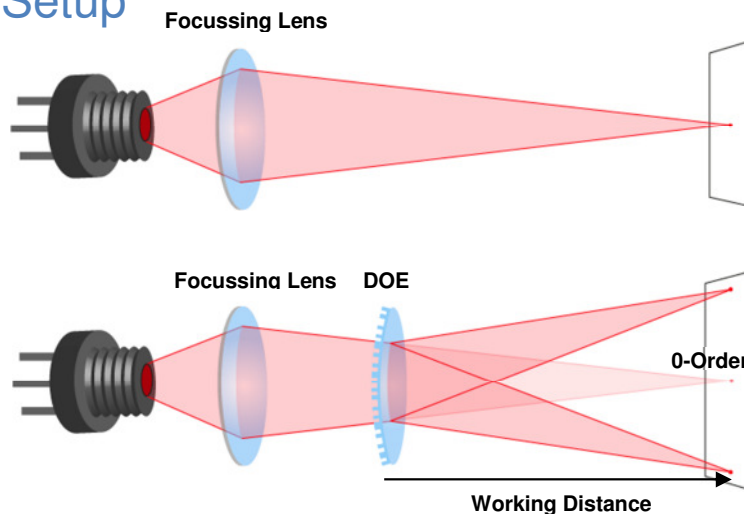


Laser diodes are the most common light source to be used with diffractive optical elements, but other laser light sources may also be used.

The DOEs are best with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser.

The 0-order spot is equivalent in size and shape to the original beam, but its power is attenuated.

Diffraction Zero Order Intensity:

Wavelength	0-Order Intensity TM	0-Order Intensity TE
520	17.0%	19.4%
594	3.4%	4.1%
638	0.6%	
654	0.5%	0.4%
669	0.6%	0.3%
687	0.9%	0.5%
780	6.5%	4.9%

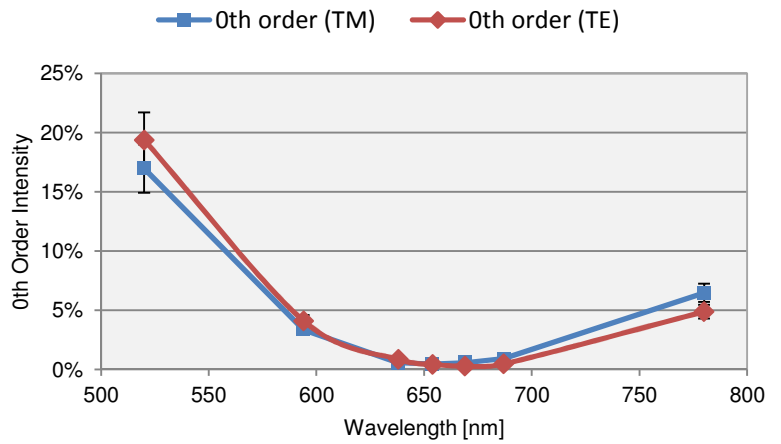

Line Power Profile

DE-R 286 (Rev. A), TM @ 654nm

