



# DE-R 340 Diffractive Optical Element

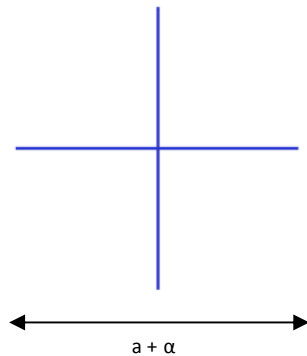

- **Element Number:** DE-R 340
- **Current Product Revision:** A
- **Description:** Cross – 60 @ 450
- **Number of Spots on Line:** 2405
- **Substrate Material:** Polycarbonate (PC)
- **Size (Ø x Thickness):** 8 x 1.2 mm
- **Design Wavelengths:** 450 nm
- **Recommended Wavelength Range:** 420-520 nm
- **Minimum Recommended Beam Diameter:** 2-3 mm

## MOUNTED VERSION

For testing or setups under laboratory conditions we offer a version mounted in 12.7 mm stainless steel frame for use with standard laboratory holders.

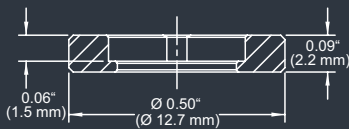

Thorlabs 8 mm steel lens adapter

## COLLIMATED / CONVERGING LASER

The laser can be collimated for long range use or converging for a fixed working distance.

Please note that the size/thickness of each spot or line depends on the focusing of the laser.


Within the recommended wavelength range, the zeroth order is not brighter than the rest of the cross. Pattern size and pattern angles and the intensity in the undiffracted central spot ('zero order intensity', see reverse page) will vary most with the wavelength.

Diffraction efficiencies given on this datasheet have been measured using elements of product revision A.

## Pattern Geometry and Diffraction Angles

Wavelength	Pattern Size @ 100 mm Distance	Pattern Angle
	<b>a</b>	<b>α</b>
405 nm	101 mm	54°
450 nm	116 mm	60°
488 nm	130 mm	66°
515 nm	140 mm	70°
532 nm	148 mm	73°
594 nm	177 mm	83°
635 nm	201 mm	90°
650 nm	211 mm	93°

## Setup

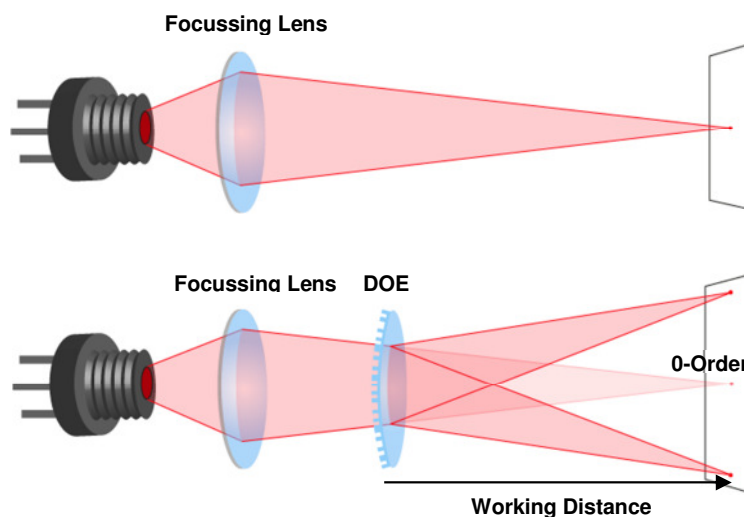


Laser diodes are the most common light source to be used with diffractive optical elements, but other laser light sources may also be used.

The DOEs are best with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser.

The 0-order spot is equivalent in size and shape to the original beam, but its power is attenuated.

## Diffraction Zero Order Intensity:

Wavelength	0-Order Intensity
402	6.6%
447	1.3%
488	1.4%
515	3.2%
532	4.5%
594	11.2%
638	17.3%
654	18.1%

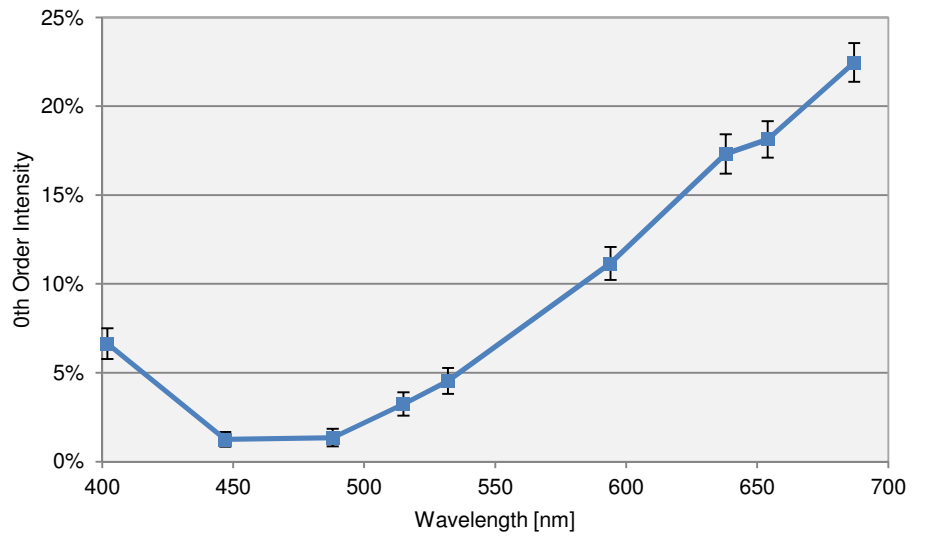

HOLOEYE Photonics AG  
Albert-Einstein-Str. 14  
12489 Berlin, Germany  
contact@holoeye.com  
www.holoeye.com



Pioneers in Photonic Technology