


DE-R 345 Diffractive Optical Element

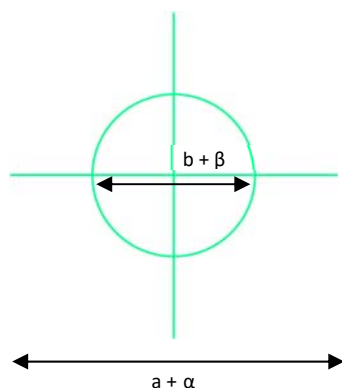

- **Element Number: DE-R 345**
- **Current Product Revision: A**
- Description: Viewfinder (Circle & Cross)
- Substrate material: Polycarbonate (PC)
- Size (\varnothing x Thickness): 8 x 0.63 mm
- Design wavelengths: 520 nm
- Recommended wavelength range: 500-540 nm
- Minimum recommended beam diameter: 2-3 mm


Pattern size and pattern angles and the intensity in the undiffracted central spot ('zero order intensity', see reverse page) will vary most with the wavelength. Within the recommended wavelength range, the element shows the lowest intensity in the central spot.

Diffraction efficiencies given on this datasheet have been measured using elements of product revision A.

Geometry and Diffraction Angles

Wavelength	Pattern Size @ 100 mm Distance		Pattern Angles	
	a	b	α	β
405 nm	38.4 mm	19.1 mm	21.7°	10.9°
450 nm	42.8 mm	21.2 mm	24.2°	12.1°
515 nm	49.4 mm	24.3 mm	27.7°	13.9°
532 nm	51.1 mm	25.1 mm	28.7°	14.3°
635 nm	61.9 mm	30.1 mm	34.4°	17.1°
650 nm	63.5 mm	30.8 mm	35.2°	17.5°
730 nm	72.2 mm	34.7 mm	39.7°	19.7°

Setup

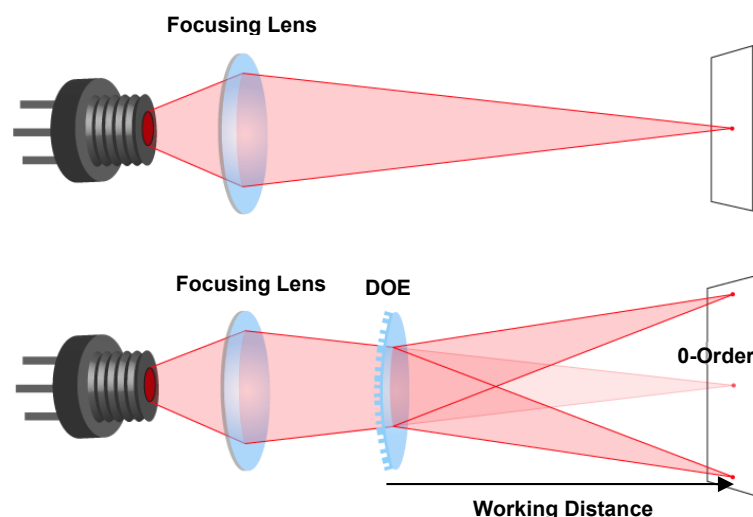


Laser diodes are the most common light source to be used with diffractive optical elements, but other laser light sources may also be used.

The DOEs are best used with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser.

The 0-order spot is equivalent in size and shape to the original beam, but its power is attenuated.

MOUNTED VERSION

For testing or setups under laboratory conditions we offer a version mounted in 12.7 mm stainless steel frame for use with standard laboratory holders.

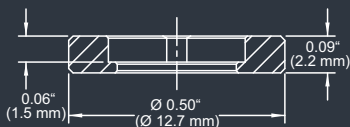


COLLIMATED / CONVERGING LASER

The laser can be collimated for long range use or converging for a fixed working distance.

Please note that the size/thickness of each spot or line depends on the focusing of the laser.

Diffraction Zero Order Intensity:

Wavelength	0-Order Intensity
402	19.4%
447	6.0%
515	0.4%
531	0.8%
640	10.2%
658	12.3%
684	15.5%
749	23.1%

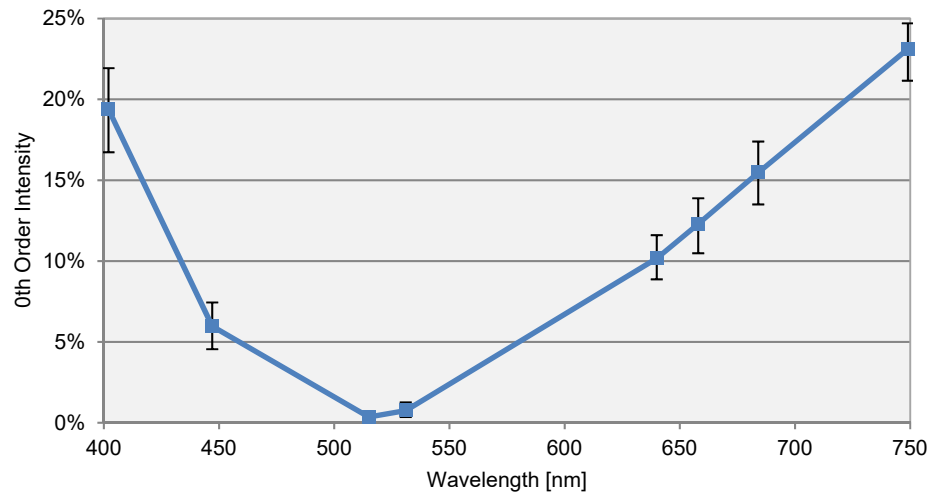

HOLOEYE Photonics AG
Volmerstr. 1
12489 Berlin, Germany
contact@holoeye.com
www.holoeye.com



Pioneers in Photonic Technology