


DE-R 364 Diffractive Optical Element




- **Element Number: DE-R 364**
- **Current Product Revision: A**
- Description: Quasi Continuous Line - 45
- Number of Spots on Line: 967
- Substrate Material: Polycarbonate (PC)
- Size (Ø x Thickness): 8 x 0.63 mm
- Design Wavelengths: 940 nm
- Recommended Wavelength Range: 850-1050 nm
- Minimum Recommended Beam Diameter: 2 mm

Within the recommended wavelength range, the zeroth order is not brighter than the rest of the line. Line width and line angle and the intensity in the undiffracted central spot ('zero order intensity', see reverse page) will vary most with the wavelength.

Diffraction efficiencies given on this datasheet have been measured using elements of product revision A.

MOUNTED VERSION

For testing or setups under laboratory conditions we offer a version mounted in 12.7 mm stainless steel frame for use with standard laboratory holders.



Ø 0.32" (Ø 8.0 mm)

Thorlabs 8 mm steel lens adapter

COLLIMATED / CONVERGING LASER


The laser can be collimated for long range use or converging for a fixed working distance.

Please note that the size/thickness of each spot or line depends on the focusing of

Pattern Geometry and Diffraction Angles

Wavelength	Line Width @ 100 mm Distance	Spot-to-spot spacing @ 100 mm Distance	Pattern Angle
	a		α
801 nm	69 mm	71.4 μm	38°
826 nm	71 mm	73.9 μm	39°
845 nm	73 mm	75.8 μm	40°
893 nm	78 mm	80.8 μm	43°
940 nm	83 mm	85.7 μm	45°
980 nm	87 mm	90.0 μm	47°
1058 nm	96 mm	98.8 μm	51°
1064 nm	96 mm	99.5 μm	51°

Setup

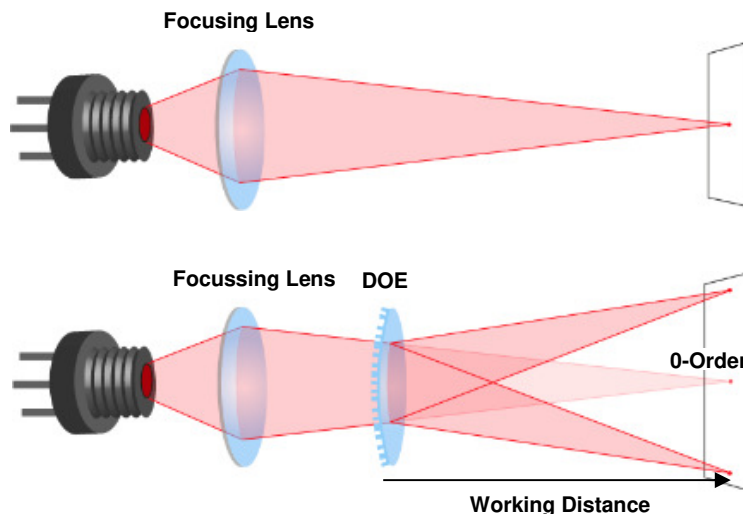


Laser diodes are the most common light source to be used with diffractive optical elements, but other laser light sources may also be used.

The DOEs are best used with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser.

The 0-order spot is equivalent in size and shape to the original beam, but its power is attenuated.

Diffraction Zero Order Intensity:

Wavelength	0-Order Intensity TE (min)	0-Order Intensity TE (typ.)	0-Order Intensity TE (max)	0-Order Intensity TM (min)	0-Order Intensity TM (typ.)	0-Order Intensity TM (max)
751	21.1%	21.5%	22.0%	13.8%	14.1%	14.4%
801	12.1%	12.6%	12.9%	6.6%	7.0%	7.2%
826	10.0%	10.0%	10.1%	4.8%	5.0%	5.0%
845	7.2%	7.4%	7.5%	3.1%	3.2%	3.3%
893	3.5%	3.6%	3.7%	1.1%	1.2%	1.3%
923	2.1%	2.1%	2.3%	0.5%	0.6%	0.7%
980	0.6%	0.6%	0.6%	0.6%	0.6%	0.7%
1058	0.6%	0.7%	0.7%	2.5%	2.5%	2.6%

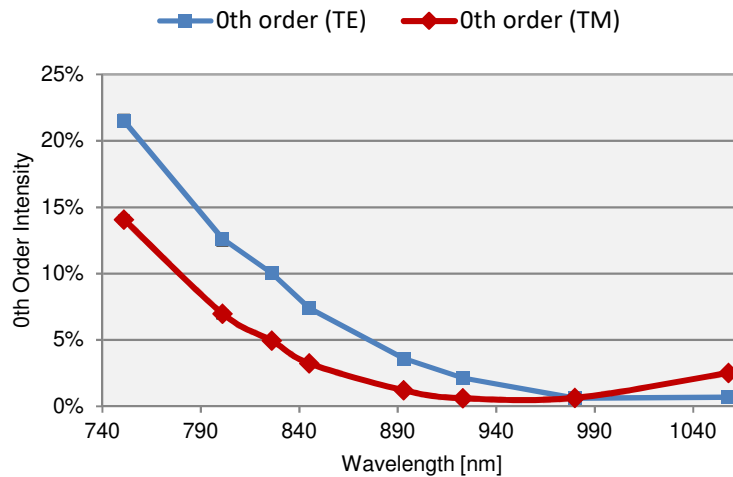

HOLOEYE Photonics AG
 Volmerstr. 1
 12489 Berlin, Germany
contact@holoeye.com
www.holoeye.com



Pioneers in Photonic Technology