


# DE 875 Diffractive Optical Element

## MOUNTED VERSION

For testing or setups under laboratory conditions, we offer a version mounted in a black anodized 25 mm aluminum frame for use with standard laboratory holders.

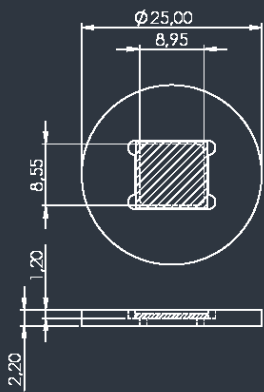


25 mm anodized aluminum mount with 8.95 x 8.55 mm clear aperture

## COLLIMATED / CONVERGING LASER

The laser can be collimated for long-range use or converging for a fixed working distance. Please note that the size/thickness of each spot or line depends on the focusing of the laser.

- **Element number:** DE 875
- **Product revision:** A
- **Description:** 1:6 dot line
- **Substrate material:** fused silica
- **AR coating on both sides of the substrate:** R < 0.5% within recommended wavelength range
- **Substrate size:** 9.95 mm x 9.35 mm
- **Thickness:** 0.725 mm
- **Design wavelength:** 405 nm
- **Recommended wavelength range:** 400 - 410 nm \*
- **Typ. diffraction efficiency:** 84% at design wavelength

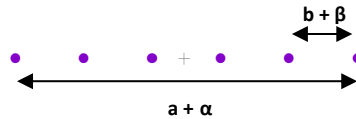

Within the recommended wavelength range, the zeroth order (Z0) has a significant lower power than the desired diffraction orders. Spot spacing and angular separation, and the ratio between zeroth order and desired orders will vary most with the wavelength. Diffraction efficiencies given on this datasheet have been measured using elements of product revision A.


The DOEs are best used with collimated or convergent laser sources. The microstructure surface should be oriented towards the laser. The zeroth order spot is equivalent in size and shape to the original beam, but its power is attenuated.

## Diffraction angles & efficiencies

Wavelength	Pattern Size @ 100 mm Distance		Pattern Angles	
$\lambda$ [nm]	a [mm]	b [mm]	$\alpha$ [°]	$\beta$ [°]
375	3.6	0.72	2.1	0.41
<b>405</b>	<b>3.9</b>	<b>0.78</b>	<b>2.2</b>	<b>0.45</b>
450	4.3	0.87	2.5	0.50

Table 1: Pattern size and pattern angle depending on the wavelength

Orders at 405nm

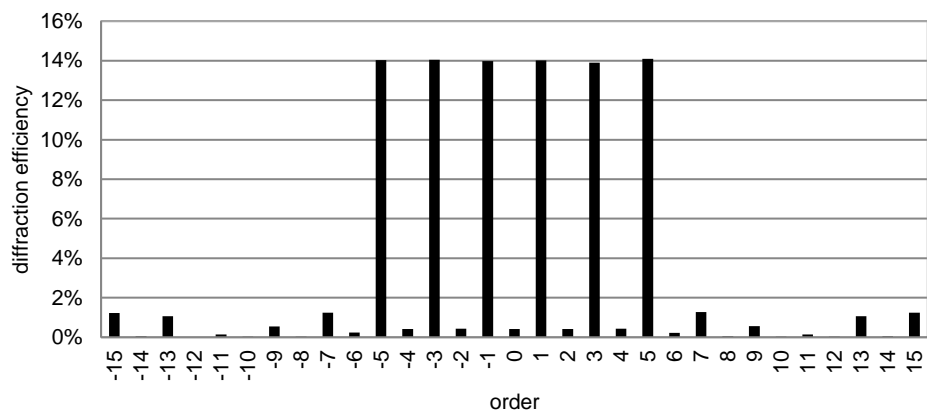

\*within the recommended wavelength range the zeroth order is  $\leq 1\%$